

IAC-3012 Industrial Media Converter



1 Port 100/1000Mbps SFP Dual Rate and 1 Port 10/100/1000Base-T Industrial Media Converter

Features

- Provide 1 Gigabit RJ-45 Copper Port & 1 SFP Port 100FX or 1000BaseF(SX/LX/LH)
- Support 9K Jumbo Frames
- Dual Wide-Range Power Input (12~48 VDC)
- Relay Output for Fault Alarm Notification (Power, Ports)
- Aluminum Housing
- Operating Temperature -40°C~75°C


Description

Connection Technology Systems (CTS) IAC-3012 series media converter is a Gigabit Ethernet 10/100/1000 Base-T to 100/1000Base-X media converter. The IAC-3012 series media converter converts traditional twisted-pair RJ45 cable into various fiber media including multi-mode, single-mode with SC connectors or bi-directional WDM to fulfill different requirements depending on the deployment.

The IAC-3012 series media converter is designed for deployment at industrial sites. With DIN-Rail mounting, you can easily mount the industrial Media Converter at your sites. The media converter supports two DC power inputs to provide redundancy and prevent any possible power loss and Relay output to serve as an alarm.

The IAC-3012 media converter supports extended working temperature from -40°C to 75°C to withstand against harsh environment for a better performance. It is designed for surveillance network system integrators, who have the needs of implementing fiber optical Ethernet networks over long distance for wide-area surveillance solutions with the demand of wide operating temperature, and are looking for an effortless and robust Gigabit media converter.

Application Diagram

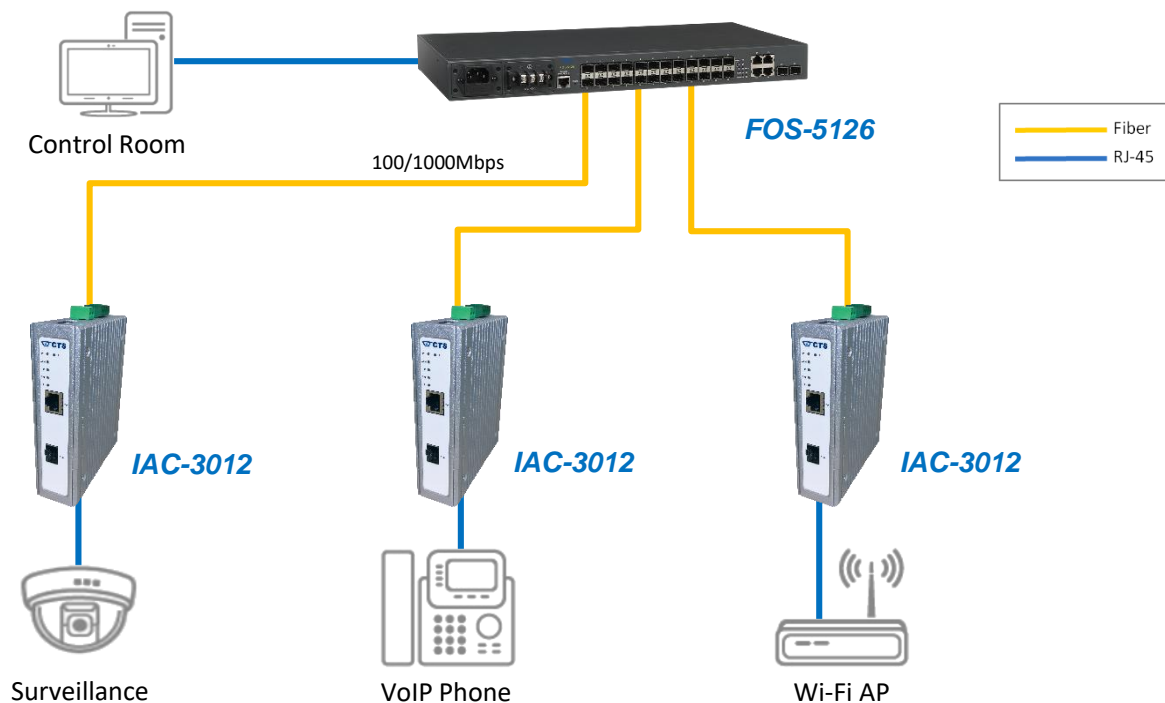

Specification

■Interface

- TP Port
1 x 10/100/1000Base-T RJ-45
- F/O Port
1 x 100/1000Base-X SFP

■Standards

- IEEE 802.3 10Base-T
- IEEE 802.3u 100Base-TX
- IEEE 802.3ab 1000Base-T
- IEEE 802.3z 1000Base-X

■H/W Specification

- Store and Forward Switching Mechanism
- Auto-Negotiation in Fiber Port
- MDI/MDIX Auto-Crossover Supported
- Support Fault Alarm Notification (Power, Ports)
- Support Auto & Force Mode Configuration
- MAC Address Table : 2K
- Memory Buffer: 128 Bytes
- Relay Output

■LED

P1, P2, ALM, TP, SFP

■Ethernet Features

Jumbo Frames: 9K Bytes

■Other Features

- DIP Switch Configuration
- Installation Type: DIN Rail Mounting

■Environmental Condition

- Operating Temperature: -40° ~ 75°C
- Storage Temperature: -40° ~ 85°C
- Humidity: 5% ~ 90%, non-condensing

■Power Requirement

- DC Input:
- Terminal Block x 1 with two power inputs
- Input Voltage: 12~48VDC
- Power Consumption: 3.4W (Max.)

■Dimension & Weight

- Size: 36x110x135 mm (WxDxH)
- Weight: 0.56Kg

■EMC/Safety

FCC Class A, CE
IEC 61000-4-2/3/4/5/6

Order Information

IAC-3012

Model	Fiber Ports					TP Ports		Support Power Source
	Speed	Type	Connector	Distance	Ports	Speed	Ports	
IAC-3012	100/1000 Mbps	SFP	-	-	1	10/100/1000 Mbps	1	Terminal Block x 1 with two power inputs